


9. Fix the metal brackets to the fascia plate by tightening the 4 screws (2 per side) supplied in the kit.



10. Fix the fascia plate to the radio by tightening the 8 screws (4 per side) supplied in the kit.

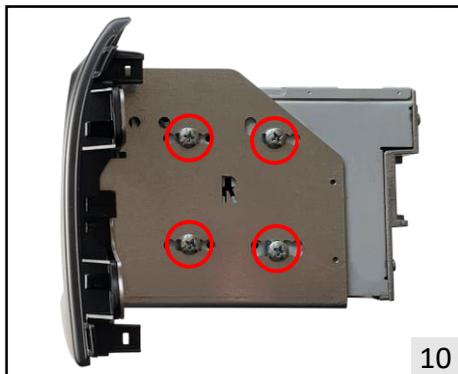

11. Make all connections. Check the proper functioning of the whole system. Fix the head unit with the OEM screws saved in the step n°4 as indicated in the picture.



12. Reassemble all components following all steps backwards. This is the final result.

# INSTALLATION MANUAL

2-DIN fascia plate:

## FIAT

**Model:** Ducato III Version 8 2021 →  
Ducato New Dash 2021 →

**Kit content:** Double DIN fascia plate, mounting brackets + screws

**Compatibility:** Compatible with Open-Dash version



All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages. 11/2021 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.



1. This is how the original dashboard looks like once removed the radio panel.



2. Disengage both air vents with a removal tool and remove both air vents.




3. Screws to be removed circled in Red.




4. Release and save the 4 screws of the radio dock.



5. Remove the OEM radio dock.

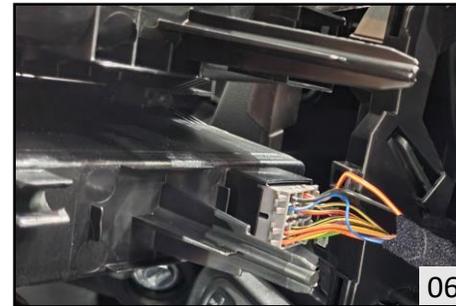

6. Disengage the ISO connector from the OEM radio dock.

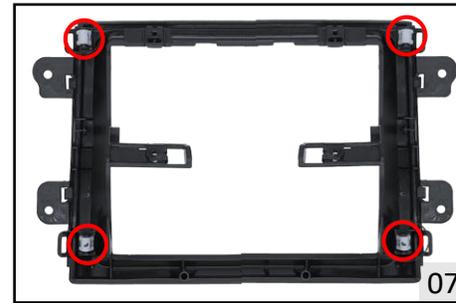

7. Remove and save the 4 clips circled found to the back side of the OEM fascia plate.



8. Apply the 4 clips removed previously to the new double DIN frame.