

9. Make all connections.  
Fix the head unit with the OEM screws saved in the step n°3 as indicated in the picture.



10. Check the proper functioning of the whole system. Assemble the monitor as described in its instructions.



11. Reassemble all components following all steps backwards. This is the final result.

\* KCE-3Qi wireless charger optionally available.  
Ask your local dealer for more information.

All installation work must be performed by a qualified professional installer only.  
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.  
11/2021 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

# INSTALLATION MANUAL

Halo fascia plate:

## FIAT

**Model:** Ducato III Version 8 2021 →  
Ducato New Dash 2021 →

**Kit content:** Halo fascia plate with compartment\*, mounting brackets + screws

**Compatibility:** Compatible with Open-Dash version



All installation work must be performed by a qualified professional installer only.  
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.  
11/2021 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.



1. This is how the original dashboard looks like once removed the radio panel.



2. Disengage both air vents with a removal tool and remove both air vents.



3. Remove and save the 4 screws circled in Red. Disengage the ISO connector from the OEM fascia plate.




4. Remove and save the 4 clips circled found to the back side of the OEM fascia plate.




5. Apply the 4 clips removed previously to the new Halo frame.



6. Fix the storage compartment\* with the 4 screws provided as shown in the picture.

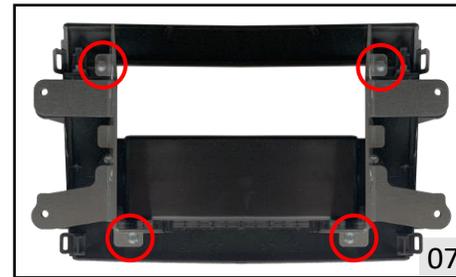

7. Fix the metal brackets to the fascia plate by tightening the 4 screws (2 per side) supplied in the kit.

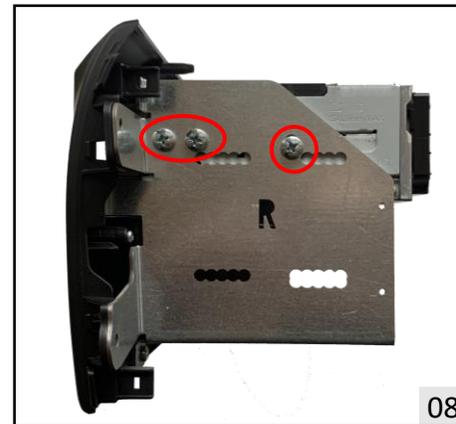

8. Fix the fascia plate to the radio by tightening the 6 screws (3 per side) supplied in the Kit.