


...connecting to the aftermarket

CTUVX03 INFODAPTER



INSTRUCTION MANUAL

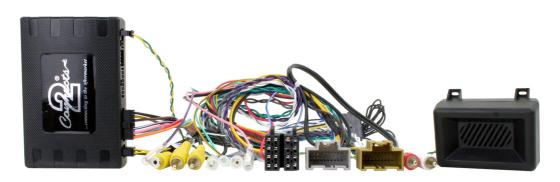



ABOUT

The Connects2 Infodapter allows vehicle information such as climate control, parking sensors and heated seats to be displayed on any aftermarket head unit with rear camera input. Extensive vehicle settings can also be adjusted from the steering wheel controls. The Infodapter also allows the use of the steering wheel controls with almost every steering wheel control compatible head unit on the market.


DIP SWITCH SETTINGS


See Fig 1.

Up = Off, Down = On

- 1: On = Pioneer head units. Off = All other head units
- 2: Setting for reverse camera. On = PAL, Off = NTSC. The default setting is Off (NTSC).
- **3:** Resets the display settings back to default. If the display settings have been manipulated in a way that it is no longer possible to make adjustments, change the DIP switch #3 from Off to On and back. This will reset the screen settings to the factory defaults. During this procedure the screen background will change to red. While the background is red, no settings can be made.
- 4: Not applicable

Interface Connections

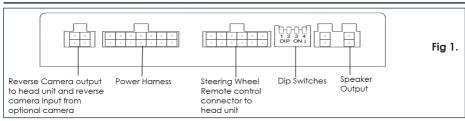

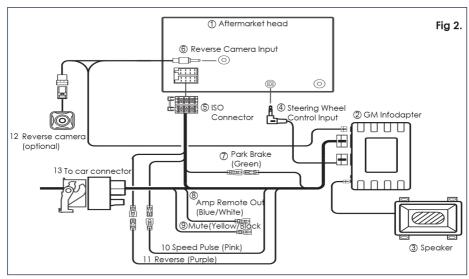

Steering Wheel Controls

- ① Source Button
- 2 Track Up/Down

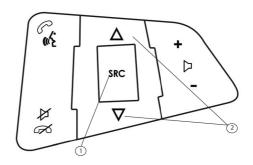


Fig 3.

Configuration Menu

To access the menu, **push and hold the source button** for 2 seconds (Fig. 3). This will enable the configuration menu. To navigate through the menu options use the **Track Up/Track Down buttons.** To select a menu option, push the **source button once**.

Configuration Menu Vehicle Settings Infodapter Settings Language Version < Back

Vehicle Settings


Vehicle settings can be adjusted via the menu. All vehicle setup options that were available with the original head unit, are now available through the aftermarket head unit. See the vehicle handbook for more information regarding these features.

Vehicle Settings

Sport Mode Settings
Time/Date
Climate and air quality
Comfort Settings
Park assist and collision detection
Exterior ambient lighting
Power door locks
Remote locking, unlocking, starting

Infodapter Settings

Screen Size/Position Make sure all 4 corner markers
 are touching the corners of the
 aftermarket head unit display.

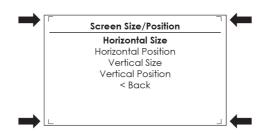

Configuration Menu...continued

 Picture Settings -Adjust Brightness, contrast and colour saturation.

Infodapter Settings

Screen Size/Position

Picture Settings

Preferences

<Back

Preferences -

Driver Position - Select Left or Right depending upon vehicle configuration.

Park Assist Version - Select according to the colour configuration of the park assist fitted to the vehicle.

Camera Connected - Select Yes if an optional camera is connected.

Reverse Priority* - Select which image (Camera or Park Assist) will be shown by default when reversing. The driver can select the desired image by pushing the Source button (Fig.3) while reversing. (*Note this option is only available when Camera Connected is set to Yes)

Park Brake Source - Set to Speed, Brake or Always On.

Bluetooth - Select On if aftermarket head unit has Bluetooth built in. Pick up/hang up buttons on the steering wheel will be enabled.

Steering Wheel - Select 6 function or 7 function type depending upon vehicle.

Logo* - Select for relevant vehicle or head unit brand logo to be shown on the dash display. (*Note that this option will only appear for supported four line dash displays. OEM navigation display is not supported)

Restore factory settings - Reverts all Infodapter settings to factory defaults. (This does not restore vehicle settings)

Preferences

Driver Position Riaht Park Assist Version 0 Camera Connected Yes Reverse Priority Park Assist Park Brake Source Speed Bluetooth On Steerina Wheel 7 Function Logo Restore factory settings < Back

Legal Information

Please consult the relevant road traffic laws governing the country in which this product is being operated. No liability is accepted for material damage, loss or personal injury, directly or indirectly, from installation and operation of this product. This product should only be operated when safe to do so.